
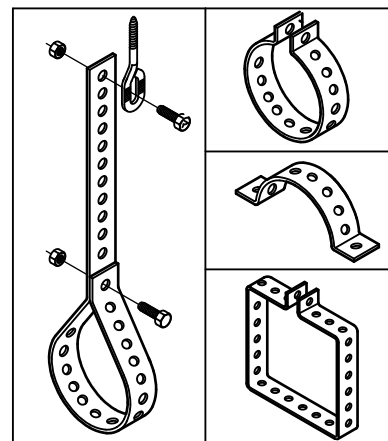


Bande de montage acier bords droits (gs)


(K 05 05)

fixation de tuyaux et de conduits d'air

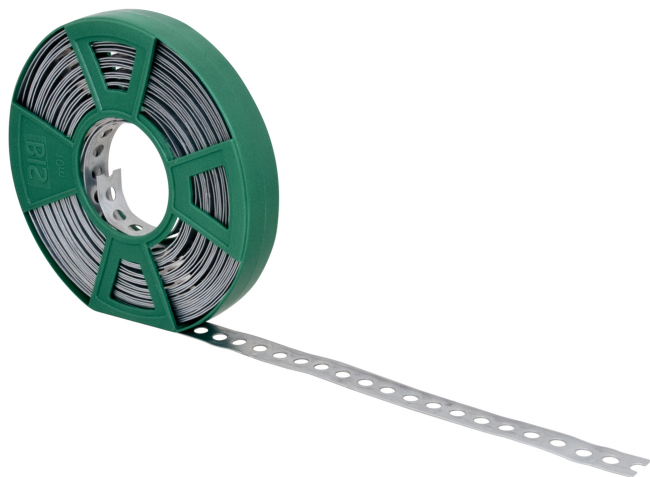


Avantages et caractéristiques

- perforation continue
- matière : acier
- traitement de surface : galvanisation sendzimir



Code article	Type	L	b x s (mm)	d1 (mm)	k (mm)	F _{a,z} (N)	Cond.1	UC
0830012	5055	10 m	12 x 1,0	5,0	8,0	1 050	10	pc.
0830017	5055	10 m	17 x 1,0	7,0	12,0	1 500	10	pc.
0830117	5055	10 m	17 x 1,0	6,5	15,0	1 290	10	pc.
0831012	5055L	10 m	12 x 0,8	5,0	8,0	840	10	pc.
0831017	5055L	10 m	17 x 0,8	7,0	12,0	1 070	10	pc.
0831026	5055L	10 m	26 x 1,0	8,5	14,0	2 620	1	pc.

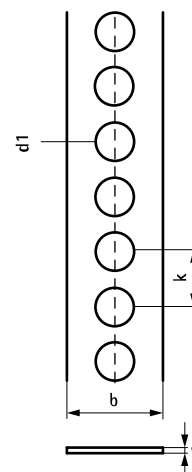

Complémentaire

Œillets de suspension
Goujons à chasser pour attaches de sol
Vis à trou oblong

Complémentaire

Boulons à trou oblong
Crochet HK